

Chip Z36459A-W06-X06-Y12 report.
(created: Thu Mar 29 21:01:52 2001)

General info :

Wafer name : Z36459A-W06
Position in wafer: X06-Y12
Raw data status flag : 63
Number of channels : 128
Digital and Analog volt. : 4.00 [V] 3.50 [V]
Master digital and analog supply current: 54.00 [mA] 81.00 [mA]
Slave digital and analog supply current : 35.00 [mA] 82.00 [mA]

BIN status: 0 (perfect chip)

Digital tests (minimum Vdd voltage [V] @40MHz and @50MHz) :

Config I/O test:	3.3	3.3
Address test:	3.3	3.3
L1 counter test:	3.3	3.3
Input reg. test:	3.3	3.3
Input lin. test:	3.3	3.3
Fake Slv. test:	3.3	3.3
Slave test:	3.3	3.4
Token test:	3.3	3.3

Digital perfect pattern: yes

Analog data:

Chip gain / sigma : 60.36 / 1.28 [mV/fC]
Chip offset / sigma : 16.16 / 7.00 [mV]
Chip output noise (max): 12.41 [mV]
Chip output noise (min): 5.52 [mV]
Quality factor: 8.48

DAC data:


Threshold DAC slope:	2.53 [mV/bit]	lin. error:	0.3 [%]
Preamp. DAC slope:	2.90 [mV/bit]	lin. error:	3.8 [%]
Shaper DAC slope:	1.83 [mV/bit]	lin. error:	5.8 [%]

Range DAC data:


range 0 :	56.8 [mV]
range 1 :	111.4 [mV]
range 2 :	165.0 [mV]
range 3 :	215.5 [mV]

Other data is available on plots following this page.


Chip Z36459A-W06-X06-Y12 Gain vs. channel

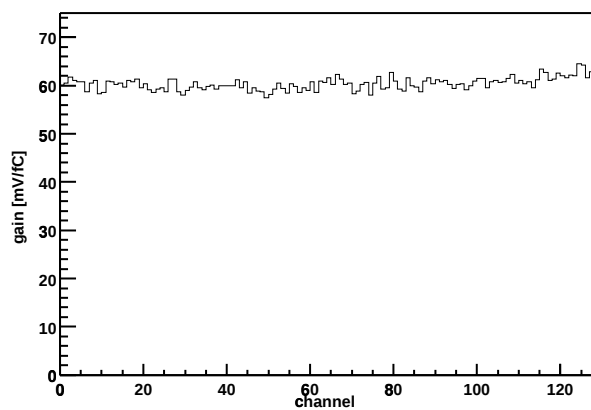


Chip Z36459A-W06-X06-Y12 Offset vs. channel

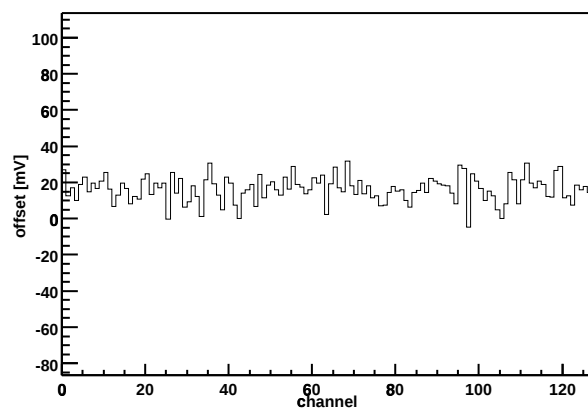


Chip Z36459A-W06-X06-Y12 Trim DAC slope vs. channel

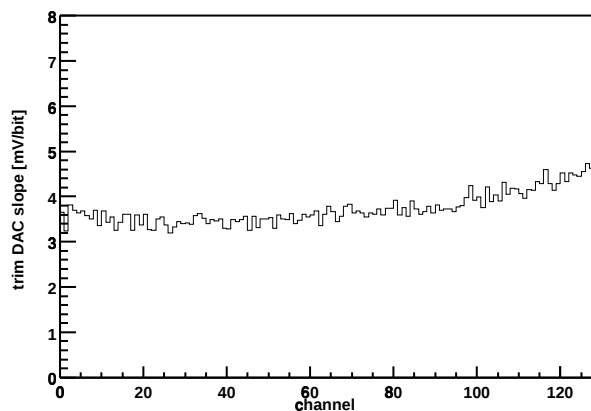


Chip Z36459A-W06-X06-Y12 trim DAC lin. error

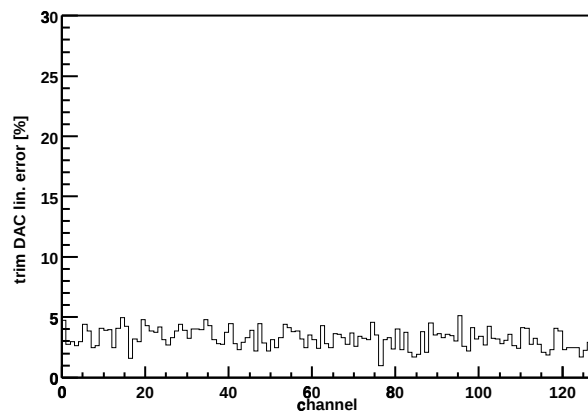


Chip Z36459A-W06-X06-Y12 Output noise vs. channel

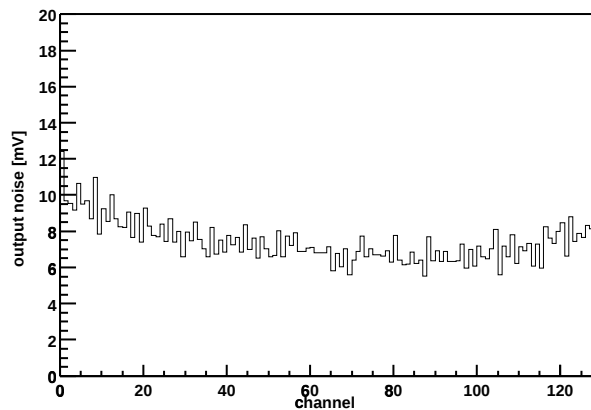


Chip Z36459A-W06-X06-Y12 Input noise vs. channel

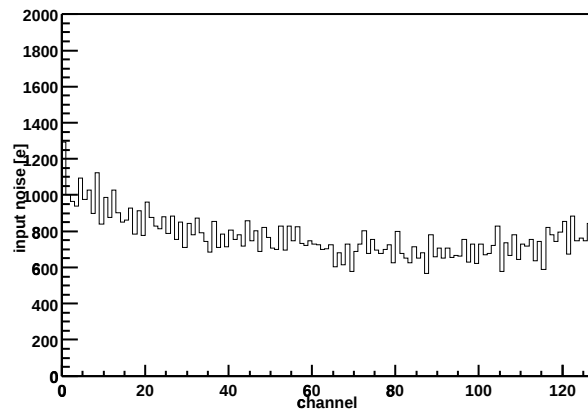

Chip Z36459A-W06-X06-Y12 threshold DAC

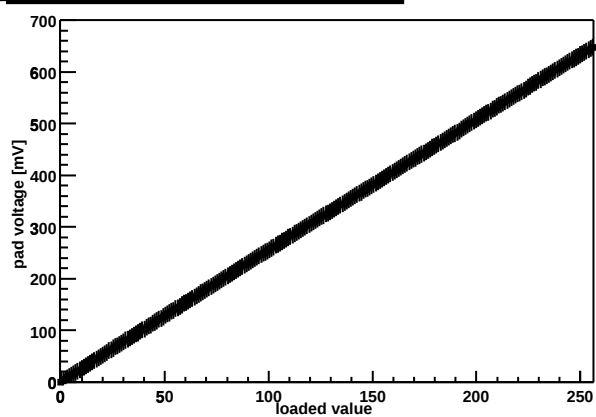

Chip Z36459A-W06-X06-Y12 preamp DAC

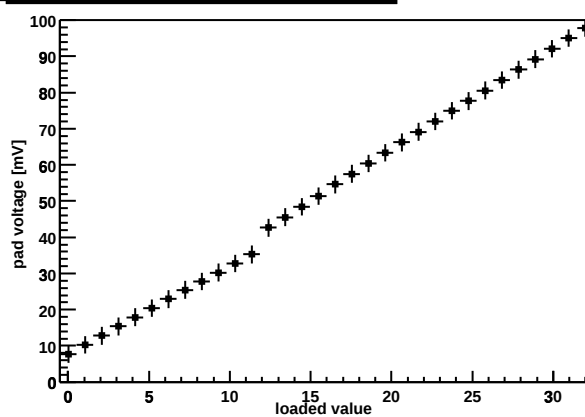

Chip Z36459A-W06-X06-Y12 shaper DAC

