Full depletion voltages in SCT

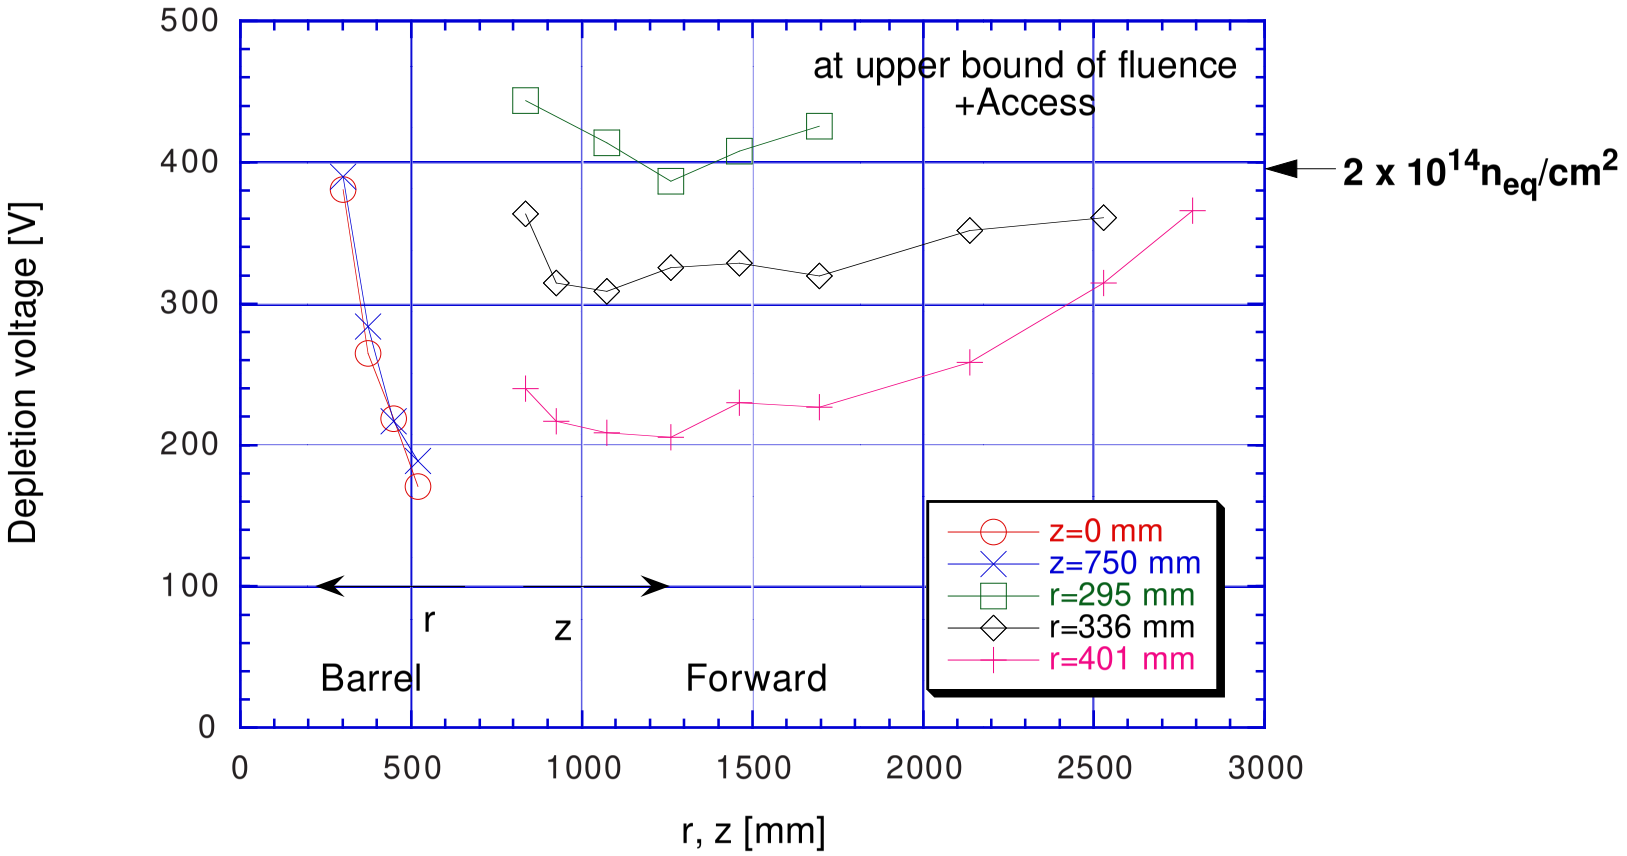

Expected depletion voltages for barrel and forward modules, at the upper bound of expected fluence and an access scenario of 2 days at 20 °C and 14 days at 17 °C every year (ref: Inner detetor TDR)